


REVISION RECORD

REV	DESCRIPTION	DFTM	DCR
RD3	Removed Randomization.	KP	N/A
RD3	Update Core Tube Diameter, Propagation Delay, See Attached	SB	1920
RD4	Update Cable Construction. See Attached.	RL	2270

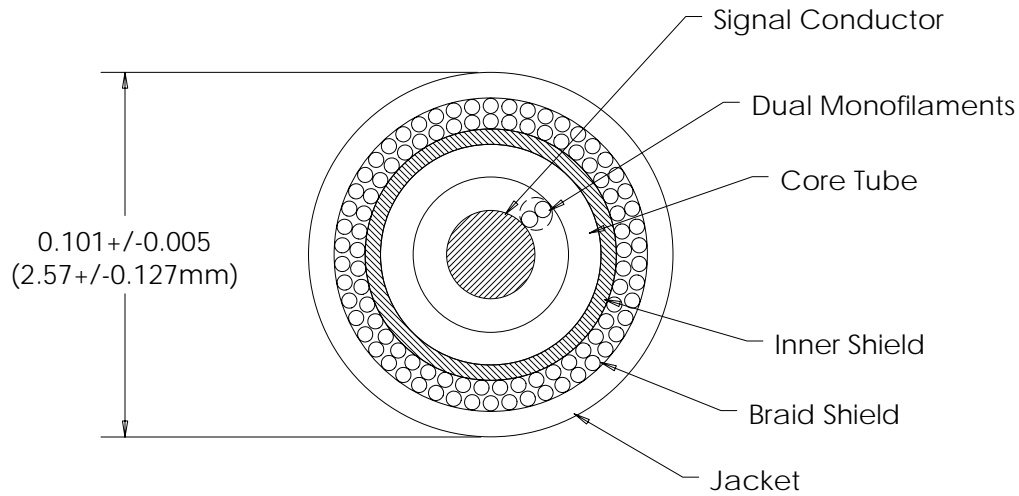

CONSTRUCTION

Signal Conductor: 0.0253" +/- 0.0002" (0.647 +/- 0.005mm), Silver Plated Copper per ASTM B-298

Dual Monofilaments: PFA, Blue

Setup: Dual Monofilaments twisted in a pair and helically wrapped around Signal Conductor

Core Tube: FEP per applicable paragraph MIL-DTL-17, 0.066" +/- 0.0005" (1.68 +/- 0.013mm) OD

Inner Shield: Helically Overlapped Flat Silver Plated Copper per ASTM B-298

Braid Shield: 40 AWG Silver Plated Copper per ASTM B-298, >90% Coverage

Overall Shield Diameter: 0.086" +/- 0.002" (2.18 +/- 0.05mm)

Jacket: FEP in accordance with MIL-DTL-17, Type IX

Wall Thickness: 0.008" (0.20mm)

Color: Blue

ELECTRICAL

Impedance: 50 +/- 1 ohms

Propagation Delay: 1.175 +/- 0.01 ns/ft (3.86 ns/m)

Velocity Of Propagation: 87%

Capacitance: 23.4 pF/ft (77.3 pF/m)

GENERAL

Weight: 12.4 lbs/1000ft (18.4 kg/km)



U.S. Patent No. 6,812,401

TEMP-FLEX CABLE, INC.

26 Milford Road South Grafton, MA 01560 Phone: 508-839-5987 Fax: 508-839-4128

CAGE CODE: 0CGL7

This document is the property of TEMP-FLEX. It may not be disclosed, reproduced, or otherwise used without permission.

DFTM: RL

DATE: 8/13/10

TITLE:

Low Loss Microwave Coax,
22 AWG

PART No:

086-2201

APPD: KP

DATE: 8/13/10

SHEET 1 OF 1

REV: RD4