


REVISION RECORD			
REV	DESCRIPTION	DFTM	DCR
X1	Preliminary Release	KP	
1	Material Update & Released to Production, Added metric information	KP	1405, 1562

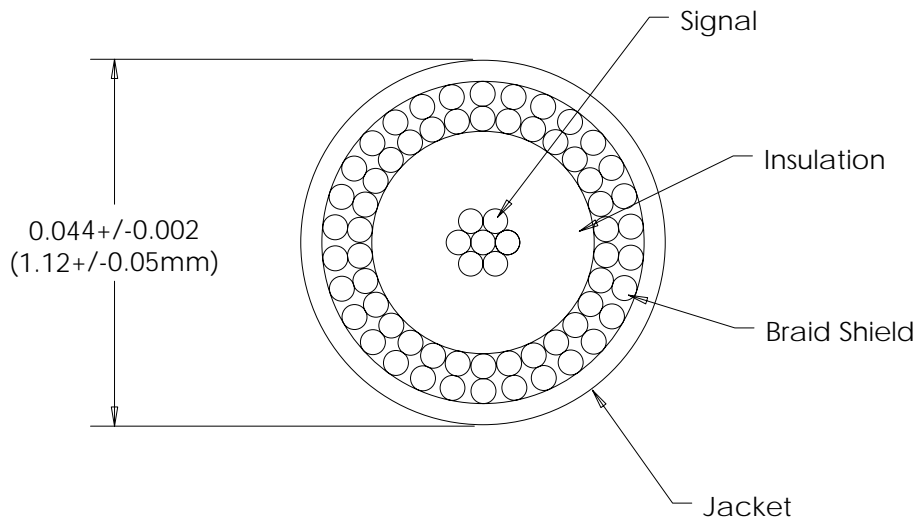

**NOTES**

Core: FEP, 0.0265" +/- 0.001" (0.67 +/- 0.025mm) OD

Signal Conductor: 32 AWG, 7/40, Silver Plated Copper, 0.0093" +/- 0.0003" (0.24 +/- 0.0076mm)

Braided Shield: 44 AWG Silver Plated Copper, >90% Coverage, 0.0345" +/- 0.002" (0.88 +/- 0.05mm)

Jacket: FEP, 0.005" +/- 0.001" (0.127 +/- 0.025mm) Wall Thickness

Color: Black

Impedance: 50 +/- 2 Ohms

Capacitance: 29.0 pF/ft

Propagation Delay: 1.45 ns/ft

<p>This document is the property of TEMP-FLEX. It may not be disclosed, reproduced, or otherwise used without permission.</p>	<p><b>TEMP-FLEX CABLE, INC.</b> 26 Milford Road South Grafton, MA 01560 Phone: 508-839-5987 Fax: 508-839-4128</p>		CAGE CODE: 0CGL7	
	DFTM: KP	DATE: 12/18/08	<p>TITLE: 50 Ohm Coax, 32 AWG, FEP Jacket</p>	
	APPD: RP	DATE: 12/18/08		
			PART No: <b>50CX-11</b>	
		SHEET 1 OF 1		REV: 1