


REVISION RECORD			
REV	DESCRIPTION	DFTM	DCR
X1	Preliminary Release	KP	
X2	Core Tube Adjustment	KP	1164, 1216

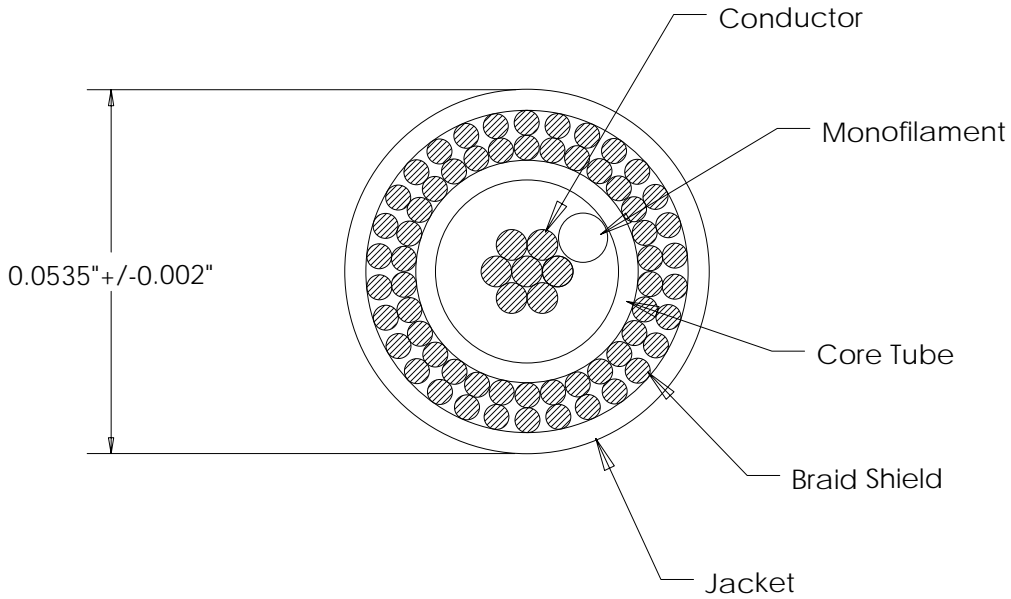

NOTES

- Conductor: 28 AWG, 7/36, SPC
- MonoFilament: PFA, Blue, Helically wrapped around Conductor
- Core Tube: FEP, 0.0365" OD
- Braid Shield: 44 AWG SPC, >90% Coverage
- Shield OD: 0.0445" +/- 0.002"
- Jacket: FEP, 0.005" Max Wall Thickness
- Color: Black
- Impedance: 50 +2, -1 Ohms
- Capacitance: 24.0 pF/ft
- Propagation Delay: 1.21 +/- 0.01 ns/ft
- UL Style: 10186

<p>This document is the property of TEMP-FLEX. It may not be disclosed, reproduced, or otherwise used without permission.</p>	TEMP-FLEX CABLE, INC.		CAGE CODE: 0CGL7		
	26 Milford Road South Grafton, MA 01560 Phone: 508-839-5987 Fax: 508-839-4128				
	DFTM: KP	DATE: 4/11/08	TITLE: 50 Ohm 28 AWG Coax, Braid Shield		PART No: 50HCX-73
	APPD: RP	DATE: 4/11/08			SHEET 1 OF 1